

SignBOX 3 Slim


LED illumination for shallow, double-sided sign boxes

Specifications


- Part number** 701946-6WDLS2
- Dimensions L x W x H** 181 mm x 34 mm x 8 mm
(7.1 in x 1.3 in x 0.3 in)
- LEDs per side** 2
- Modules per meter (foot)** 6.6 (2)
- Coverage per row** 305 mm (12 in)
- Operating temperature** -40° C to +70° C
- Protection class** IP66
- Binning** 3-step MacAdam Ellipse
- Life rating** >60,000 hours
- Power per module** 1.20 W
- Efficacy** 150 lm/W
- Fastening** Clips with mechanical fasteners
- Packaging** 60 modules (9.1 m / 30 ft) per carton,
20 clips included
- Color temperatures** 6500 K
- Lumens per module** 180
- Mounting hardware** Bracket Bag of 10 402107-10
Clip Bag of 20 402106-20
Coupler Bag of 10 402108-10



SignBOX™ 3 Slim is covered by US and foreign patents pending.

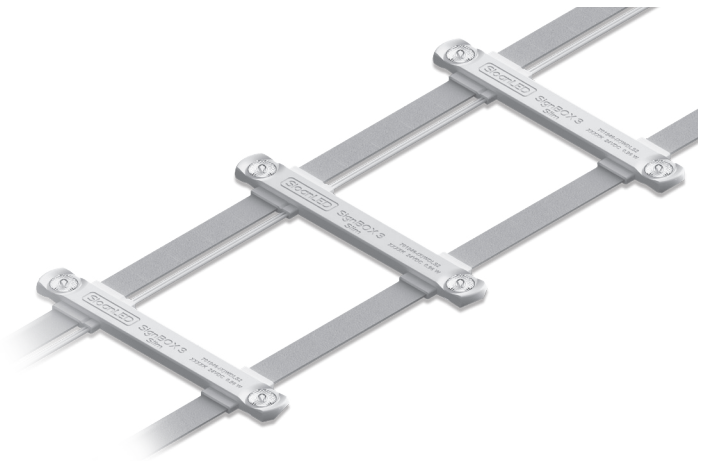

Luminous Intensity Distribution

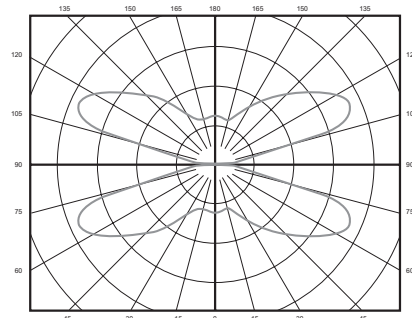


Power Supply Capacity*

24 VDC power supply	Maximum SignBOX 3 Slim modules
30 W Power Supply (EU/ROW ONLY)	21
60 W Power Supply	43
100 W Power Supply	72
150 W Power Supply (EU/ROW ONLY)	108
300 W Power Supply	3 x 72
Power used per meter/foot in Watts	7.9 W / 2.4 W

* Wet location power supply: Refer to install guide for configurations.

Accessories

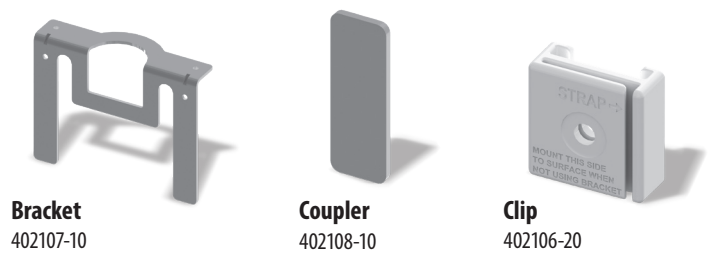

Bracket
402107-10

Coupler
402108-10

Clip
402106-20
Each carton of SignBOX 3 Slim comes with 20 clips

SloanLED Headquarters
5725 Olivas Park Drive, Ventura, CA, USA
805.676.3200 • info@SloanLED.com

SloanLED Europe b.v.
Argonstraat 110, 2718 SN Zoetermeer, NL
+31 88 12 44 900 • europe@SloanLED.com



SloanLED.com



Visit product page for details.